



V-リング A

d_1 寸法が2つのV-リングに属する場合は、大きいサイズをお選びください。単位はすべてmmです。



取付前の寸法

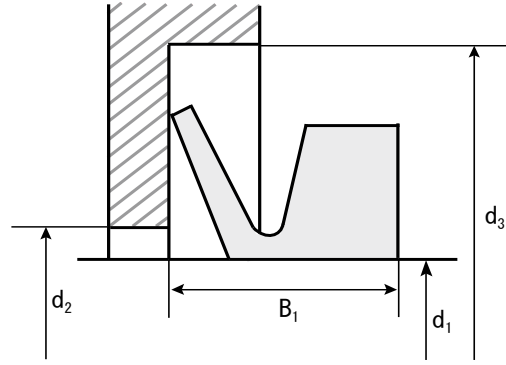


取付後の寸法


V-リング 呼称	軸径 d_1	取付前の 穴径 d	断面の 高さ C	底面の 巾 A	取付前の 巾 B	最大穴径 d_2	最小穴径 d_3	取付後の巾 B_1						
V-3A	2.7 - 3.5	2.5	1.5	2.1	3.0	d_1+1	d_1+4	2.5 ± 0.3						
V-4A	3.5 - 4.5	3.2	2	2.4	3.7	d_1+1	d_1+6	3.0 ± 0.4						
V-5A	4.5 - 5.5	4												
V-6A	5.5 - 6.5	5												
V-7A	6.5 - 8	6												
V-8A	8 - 9.5	7												
V-10A	9.5 - 11.5	9	3	3.4	5.5	d_1+1	d_1+9	4.5 ± 0.6						
V-12A	11.5 - 12.5	10.5												
V-13A	12.5 - 13.5	11.7												
V-14A	13.5 - 15.5	12.5												
V-16A	15.5 - 17	14												
V-18A	17.5 - 19	16												
V-20A	19 - 21	18	4	4.7	7.5	d_1+2	d_1+12	6.0 ± 0.8						
V-22A	21 - 24	20												
V-25A	24 - 27	22												
V-28A	27 - 29	25												
V-30A	29 - 31	27												
V-32A	31 - 33	29												
V-35A	33 - 36	31												
V-38A	36 - 38	34												
V-40A	38 - 43	36	5	5.5	9.0	d_1+2	d_1+15	7.0 ± 1.0						
V-45A	43 - 48	40												
V-50A	48 - 53	45												
V-55A	53 - 58	49												
V-60A	58 - 63	54												
V-65A	63 - 68	58												
V-70A	68 - 73	63							6	6.8	11.0	d_1+3	d_1+18	9.0 ± 1.2
V-75A	73 - 78	67												
V-80A	78 - 83	72												
V-85A	83 - 88	76												
V-90A	88 - 93	81												
V-95A	93 - 98	85												
V-100A	98 - 105	90	7	7.9	12.8	d_1+4	d_1+21	10.5 ± 1.5						
V-110A	105 - 115	99												
V-120A	115 - 125	108												
V-130A	125 - 135	117												
V-140A	135 - 145	126												
V-150A	145 - 155	135							8	9.0	14.5	d_1+4	d_1+24	12.0 ± 1.8
V-160A	155 - 165	144												
V-170A	165 - 175	153												
V-180A	175 - 185	162												
V-190A	185 - 195	171												
V-199A	195 - 210	180												

V-リング A

d_1 寸法が2つのV-リングに属する場合は、大きいサイズをお選びください。単位はすべてmmです。



取付前の寸法

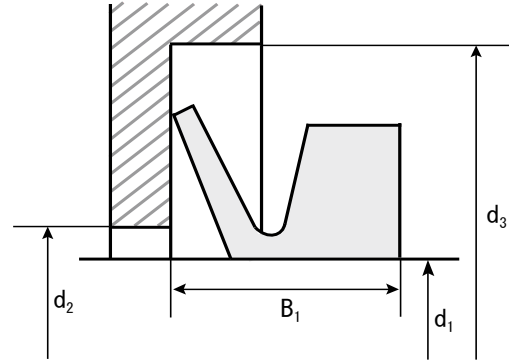

取付後の寸法

V-リング 呼称	軸径 d_1	取付前の 穴径 d	断面の 高さ C	底面の 巾 A	取付前の 巾 B	最大穴径 d_2	最小穴径 d_3	取付後の巾 B_1
V-200A	190 - 210	180	15	14.3	25.0	d_1+10	d_1+45	20.0 ± 4.0
V-220A	210 - 235	198						
V-250A	235 - 265	225						
V-275A	265 - 290	247						
V-300A	290 - 310	270						
V-325A	310 - 335	292						
V-350A	335 - 365	315						
V-375A	365 - 390	337						
V-400A	390 - 430	360						
V-450A	430 - 480	405						
V-500A	480 - 530	450						
V-550A	530 - 580	495						
V-600A	580 - 630	540						
V-650A	630 - 665	600						
V-700A	665 - 705	630						
V-725A	705 - 745	670						
V-750A	745 - 785	705						
V-800A	785 - 830	745						
V-850A	830 - 875	785						
V-900A	875 - 920	825						
V-950A	920 - 965	865						
V-1000A	965 - 1015	910						
V-1050A	1015 - 1065	955						
V-1100A	1065 - 1115	1000						
V-1150A	1115 - 1165	1045						
V-1200A	1165 - 1215	1090						
V-1250A	1215 - 1270	1135						
V-1300A	1270 - 1320	1180						
V-1350A	1320 - 1370	1225						
V-1400A	1370 - 1420	1270						
V-1450A	1420 - 1470	1315						
V-1500A	1470 - 1520	1360						
V-1550A	1520 - 1570	1405						
V-1600A	1570 - 1620	1450						
V-1650A	1620 - 1670	1495						
V-1700A	1670 - 1720	1540						
V-1750A	1720 - 1770	1585						
V-1800A	1770 - 1820	1630						
V-1850A	1820 - 1870	1675						
V-1900A	1870 - 1920	1720						
V-1950A	1920 - 1970	1765						
V-2000A	1970 - 2020	1810						

V-2000A以上は特注品になります。

断面及び軸方向の寸法はV-200A～V-2000Aまでの寸法と同じです。