


バックアップリング

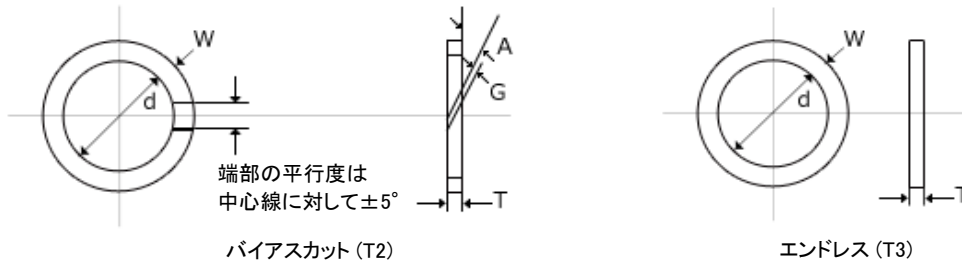

リングの形状・寸法

バックアップリング MS 28774 (旧ARP MS28775 Oリング対応)

(単位: mm)

MS 28774 呼び番号	d 内径	W 幅	T 厚さ	G すきま	A			
004	2.77	1.32 ∩ 1.37	1.14 ∩ 1.32	0 ∩ 0.13	29° 0-4			
005	3.15				33° 0-3			
006	3.56				30° 0-3			
007	4.34				26° 0-4			
008	5.13				±0.03	1.14 ∩ 1.32	0 ∩ 0.16	22° 0-3
009	5.94							
010	6.73							
011	8.31							
012	9.91							
013	11.56							
014	13.16							
015	14.73							
016	16.33							
017	17.91							
018	19.51							
019	21.08							
020	22.81							
021	24.38							
022	25.98							
023	27.56							
024	29.16							
025	30.73							
026	32.33							
027	33.91							
028	35.51							
110	9.91	2.16 ∩ 2.21	1.14 ∩ 1.32	0 ∩ 0.16	22° 0-3			
111	11.48							
112	13.08							
113	14.66							
114	16.26							
115	17.83							
116	19.43							
117	21.13							
118	22.73							
119	24.31							
120	25.91							
121	27.48							
122	29.08							
123	30.66							
124	32.26							
125	33.83							
126	35.48							
127	37.06							
128	38.66							
129	40.23							
130	41.83							

MS28774 呼び番号	d 内径	W 幅	T 厚さ	G すきま	A	
131	43.41	±0.03	2.16 ∩ 2.21	0 ∩ 0.16	22° 0-3	
132	45.01					
133	46.58					
134	48.18					
135	49.76					
136	51.36					
137	52.93					
138	54.53					
139	56.11					
140						これらの呼び番号については MS 27595の同一番号をご参照ください
141						
142						
143						
144						
145						
146						
147						
148						
149						
210	19.46	±0.03	3.00 ∩ 3.05	1.14 ∩ 1.32	0 ∩ 0.16	
211	21.03					
212	22.63					
213	24.21					
214	25.81					
215	27.38					
216	28.98					
217	30.56					
218	32.16					
219	33.88					
220	35.48					
221	37.06					
222	38.66					
223	41.83	0 ∩ 0.18				
224	45.01					
225	48.18					
226	51.36					
227	54.53					
228	57.71					
229	60.88					
230	64.06					
231			これらの呼び番号については MS 27595の同一番号をご参照ください			
232						
233						
234						
235						
236						


バックアップリング

(単位：mm)

MS 28774 呼び番号	d 内径	W 幅	T 厚さ	G すきま	A
237	これらの呼び番号については MS 27595の同一番号をご参照ください				
238					
239					
240					
241					
242					
243					
244					
245					
246					
247					
325	38.43	±0.03	22° 0-3	0 ┆ 0.18	
326	41.61				
327	44.78				
328	47.96				
329	51.13				
330	54.31				
331	57.61				
332	60.78				
333	63.96				
334	67.13				
335	70.31				
336	8.31				
337	9.91				
338	79.83				
339	83.13				
340	86.31				
341	89.48				
342	92.66				
343	95.83				
344	99.01				
345	102.31				
346	105.49				
347	108.66				
348	111.84				
349	115.01				
425	115.60				
426	118.77				
427	121.95				
428	125.12				
429	128.30				
430	131.47				
431	134.65				
432	137.82				
433	141.00				
434	144.17				
435	147.35				
436	150.52				
437	153.70				
438	これらの呼び番号については MS 27595の同一番号をご参照ください				
439					
440					
441					
442					
443					
444					
445					
446					
447					
448					
449					

MS 28774 呼び番号	d 内径	W 幅	T 厚さ	G すきま	A
450	これらの呼び番号については MS 27595の同一番号をご参照ください				
451					
452					
453					
454					
455					
456					
457					
458					
459					
460					

バックアップリング  
MS 28773 (旧ARP MS28778 Oリング対応)

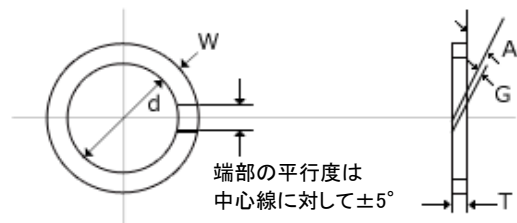


バイアスカット (T2)

リングの形状・寸法

MS 28773 呼び番号	バイアスカット (T2)			
	d 内径	W±0.03	T±0.03	G すきま
02	6.25	2.84	1.42	0 ┆ 0.16
03	7.85			
04	9.14			
05	10.74	2.97	1.55	
06	12.14			
08	16.66	3.18		
10	19.53			
12	23.90	4.29	1.85	
16	30.25			
20	38.18			
24	44.50			
28	54.03			
32	60.38			

## バックアップリング



エンドレス (T3)

## リングの形状・寸法

## バックアップリング MS 27595 (旧ARP MS28775 Oリング対応)

MS 27595 呼び番号	d 内径	W 幅	T 厚さ
004	2.03	±0.03	1.37 ∩ 1.43
005	2.82		
006	3.18		
007	3.96		
008	4.75		
009	5.56		
010	6.35		
011	7.92		
012	8.31		
013	9.91		
014	12.78		
015	14.35		
016	15.95		
017	17.53		
018	19.13		
019	20.70		
020	22.38		
021	23.95	±0.05	1.21 ∩ 1.33
022	25.55		
023	27.13		
024	28.73		
025	30.30		
026	31.90		
027	33.48		
028	35.08		
110	9.50	±0.03	2.20 ∩ 2.27
111	11.10		
112	12.67		
113	14.27		
114	15.85		
115	17.45		
116	19.02		
117	20.70		
118	22.28		
119	23.88		
120	25.45	±0.05	2.20 ∩ 2.27
121	27.05		
122	28.63		
123	30.23		
124	31.80		
125	33.44		
126	34.98		
127	36.58		
128	38.15		
129	39.75		
130	41.38		

MS 27595 呼び番号	d 内径	W 幅	T 厚さ
131	42.95	±0.05	2.20 ∩ 2.27
132	44.55		
133	46.13		
134	47.73		
135	49.33		
136	50.90		
137	52.50		
138	54.08		
139	55.68		
140	57.25		
141	58.85		
142	60.43		
143	62.03		
144	63.60		
145	65.20		
146	66.78		
147	68.38		
148	69.95		
149	71.55		
210	19.13	±0.03	1.21 ∩ 1.33
211	20.70		
212	22.30		
213	23.88		
214	25.48		
215	27.05		
216	28.65	±0.05	3.00 ∩ 3.05
217	30.23		
218	31.83		
219	33.40		
220	35.00		
221	36.58		
222	38.18		
223	41.38		
224	44.55		
225	47.75		
226	50.93		
227	54.10		
228	57.28		
229	60.45		
230	63.63		
231	66.80		
232	69.98		
233	73.15		
234	76.33		
235	79.50		
236	82.68		

## バックアップリング

MS 27595 呼び番号	d 内径	W 幅	T 厚さ		
237	85.85	3.00 ∩ 3.05	1.21 ∩ 1.33		
238	89.03				
239	92.20				
240	95.38				
241	98.55				
242	101.73				
243	104.90				
244	108.08				
245	111.25				
246	114.43				
247	117.60				
325	38.02			4.67 ∩ 4.73	1.80 ∩ 1.91
326	41.20				
327	44.40				
328	47.57				
329	50.50				
330	53.92				
331	57.10				
332	60.27				
333	63.45				
334	66.62				
335	69.80				
336	8.31				
337	9.91				
338	79.32				
339	82.50				
340	85.67				
341	88.85				
342	92.02				
343	95.20				
344	98.37				
345	101.55				
346	104.72				
347	107.90				
348	111.07				
349	114.25				
425	114.35	5.97 ∩ 6.02	2.69 ∩ 2.80		
426	117.53				
427	120.70				
428	123.88				
429	127.05				
430	130.23				
431	133.40				
432	136.58				
433	139.75				
434	142.93				

MS 27595 呼び番号	d 内径	W 幅	T 厚さ
435	146.10	±0.05	
436	149.28		
437	152.45		
438	158.80		
439	165.15		
440	171.50		
441	177.85		
442	184.20		
443	190.55		
444	196.90		
445	203.25	±0.08	5.97 ∩ 6.02
446	215.95		
447	228.65		
448	241.35		
449	254.05		
450	266.75	±0.10	
451	279.45		
452	292.15		
453	304.85		
454	317.55		
455	330.25	±0.13	
456	342.95		
457	355.65		
458	368.35		
459	381.05		
460	393.75		

※弊社カタログ冊子、記載ミスのため、Webサイトをご参照ください。

[http://www.kayo-corp.co.jp/products/oring/backup\\_ring/ms28774\\_ms27595\\_ms28773.html](http://www.kayo-corp.co.jp/products/oring/backup_ring/ms28774_ms27595_ms28773.html)