


バックアップリング

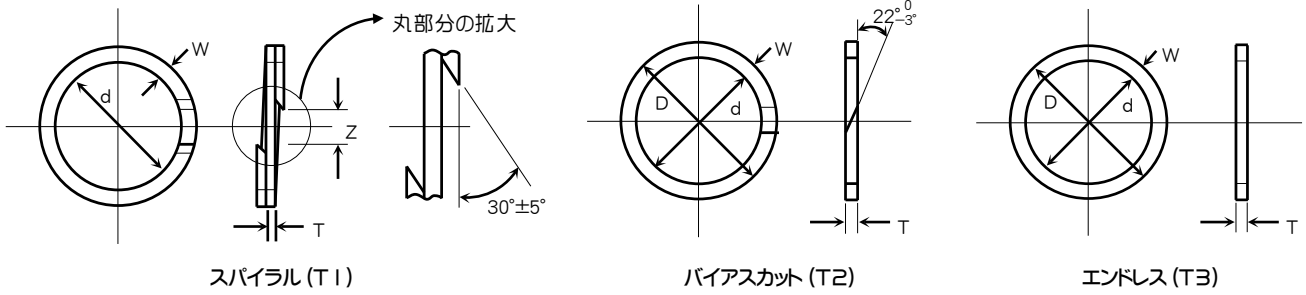

※ スキマZは $d - 0.05$ の軸に装着したときの値とする

※ バイアスカットはエンドレスにカット加工を入れたものである

リングの形状・寸法

※ バックアップリング、ウェアリングの材質は、一般的にテフロン (PTFE) ですが、その他の材質も製作可能です。 お問い合わせください。

JIS B 2407 G番

(単位: mm)

| バックアップリング 呼び番号 | スパイラル (T1) | | | | バイアスカット (T2) および エンドレス (T3) | | | | | |
|-------------------|------------|-----------------------|--------------|-------------|--------------------------------|---------|------------|---------------|-------|------|
| | 内径 d | 幅 W | 厚さ T | すぎま Z | 内径 d | 外径 D | 厚さ T | | | |
| G25 | 25.0 | 2.5 +0.03 -0.05 | 0.7 ±0.05 | 4.5 ±1.5 | 25.0 | 30.0 | 0 -0.20 | 1.25 ±0.10 | | |
| G30 | 30.0 | | | | 30.0 | | | | | |
| G35 | 35.0 | | | | 35.0 | +0.20 | | | 40.0 | |
| G40 | 40.0 | | | | 40.0 | 0 | | | 45.0 | |
| G45 | 45.0 | | | | 45.0 | | | | 50.0 | |
| G50 | 50.0 | | | | 50.0 | | | | 55.0 | |
| G55 | 55.0 | | | | 55.0 | | | | 60.0 | |
| G60 | 60.0 | | | | 60.0 | | | | 65.0 | |
| G65 | 65.0 | | | | 65.0 | | | | 70.0 | |
| G70 | 70.0 | | | | 70.0 | | | | 75.0 | |
| G75 | 75.0 | | | | 75.0 | | 80.0 | | | |
| G80 | 80.0 | | | | 80.0 | | 85.0 | | | |
| G85 | 85.0 | | | | 85.0 | | 90.0 | | | |
| G90 | 90.0 | | | | 90.0 | | 95.0 | | | |
| G95 | 95.0 | | | | 95.0 | | 100.0 | | | |
| G100 | 100.0 | | | | 100.0 | | 105.0 | | | |
| G105 | 105.0 | | | | 105.0 | | 110.0 | | | |
| G110 | 110.0 | | | | 110.0 | | 115.0 | | | |
| G115 | 115.0 | | | | 115.0 | | 120.0 | | | |
| G120 | 120.0 | | | | 120.0 | | 125.0 | | | |
| G125 | 125.0 | | | | 125.0 | | 130.0 | | | |
| G130 | 130.0 | 130.0 | | 135.0 | | | | | | |
| G135 | 135.0 | 135.0 | | 140.0 | | | | | | |
| G140 | 140.0 | 5.0 +0.03 -0.05 | 0.9 ±0.06 | 6.0 ±2.0 | 140.0 | 145.0 | +0.25 | 145.0 | 0 | 1.25 |
| G145 | 145.0 | | | | 145.0 | 0 | 150.0 | -0.25 | ±0.10 | |
| G150 | 150.0 | | | | 150.0 | | 160.0 | | | |
| G155 | 155.0 | | | | 155.0 | | 165.0 | | | |
| G160 | 160.0 | | | | 160.0 | | 170.0 | | | |
| G165 | 165.0 | | | | 165.0 | | 175.0 | | | |
| G170 | 170.0 | | | | 170.0 | | 180.0 | | | |
| G175 | 175.0 | | | | 175.0 | | 185.0 | | | |
| G180 | 180.0 | | | | 180.0 | | 190.0 | | | |
| G185 | 185.0 | | | | 185.0 | | 195.0 | | | |
| G190 | 190.0 | | | | 190.0 | | 200.0 | | | |
| G195 | 195.0 | | | | 195.0 | | 205.0 | | | |
| G200 | 200.0 | | | | 200.0 | | 210.0 | +0.30 | 0 | 1.9 |
| G210 | 210.0 | | | | 210.0 | | 220.0 | -0.30 | ±0.13 | |
| G220 | 220.0 | | | | 220.0 | | 230.0 | | | |
| G230 | 230.0 | | | | 230.0 | | 240.0 | | | |
| G240 | 240.0 | | | | 240.0 | | 250.0 | | | |
| G250 | 250.0 | | | | 250.0 | | 260.0 | | | |
| G260 | 260.0 | | | | 260.0 | | 270.0 | | | |
| G270 | 270.0 | | | | 270.0 | | 280.0 | | | |
| G280 | 280.0 | | | | 280.0 | | 290.0 | | | |
| G290 | 290.0 | 290.0 | | 300.0 | | | | | | |
| G300 | 300.0 | 300.0 | | 310.0 | | | | | | |