
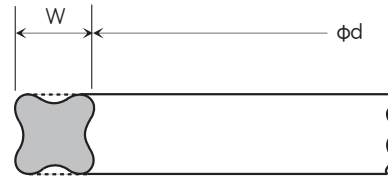


回転用ツイスターリング

12. 回転用ツイスターリング

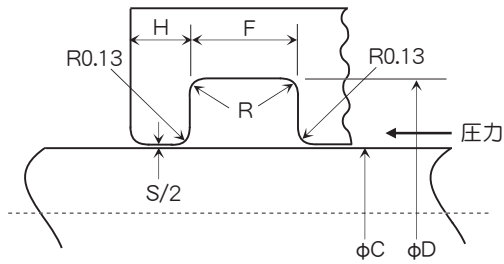

(単位: mm)

呼び番号	軸径 C		ツイスターリングの寸法		みぞ寸法			H	直径での すきま S		
			幅 W	内径 d	内径 D	幅 F	角面 R				
TS-7	7.0		2.1 ±0.1 (±0.2)	7.40	10.7	2.6	0.4	2 以下	0.18 以下		
TS-8	8.0	+0		8.40						11.7	
TS-9	9.0	-0.015		9.40						12.7	
TS-10	10.0			10.40						13.7	
TS-11	11.0		2.7 ±0.1 (±0.2)	11.50	23.9	3.2	0.4	5 以下			
TS-12	12.0			12.50						15.9	
TS-13	13.0			13.60						16.9	
TS-14	14.0	+0		14.60						17.9	
TS-15	15.0	-0.018		15.60						18.9	
TS-16	16.0			16.80						19.9	
TS-17	17.0			17.80						20.9	
TS-18	18.0			19.00						21.9	
TS-19	19.0		20.00	22.9	+0 -0.05	+0.13 -0	制限 なし				
TS-20	20.0		21.20	24.9							
TS-21	21.0		22.20	25.9							
TS-22	22.0	+0	23.20	26.9							
TS-24	24.0	-0.021	25.20	31.9							
TS-25	25.0		26.20	32.9							
TS-26	26.0		27.20	33.9							
TS-28	28.0		29.20	35.9							
TS-30	30.0		31.20	37.9							
TS-32	32.0		33.20	39.9							
TS-35	35.0		4.3 ±0.15 (±0.3)	36.30				47.9	5.1	0.8	0.22 以下
TS-38	38.0			39.30							
TS-40	40.0	+0		41.40	47.9						
TS-42	42.0	-0.025		43.50	49.9						
TS-45	45.0		5.7 ±0.15	46.50	57.9	6.5	0.8	0.25 以下			
TS-48	48.0			49.60					52.9		
TS-50	50.0			51.70					55.9		
TS-55	55.0			56.70					65.6		
TS-60	60.0			61.80					70.6		
TS-65	65.0	+0		67.00					75.6		
TS-70	70.0	-0.030		72.00					80.6		
TS-75	75.0			77.50					85.6		
TS-80	80.0		±0.4	82.40	100.6	6.5	0.25 以下				
TS-85	85.0			86.50				95.6			
TS-90	90.0	+0		92.70				100.6			
TS-100	100.0	-0.035		103.00				110.6			
TS-110	110.0		113.30	120.6							
TS-120	120.0		122.40	130.6							

※ ツイスターリングの寸法公差は、NBR70°に適用し、()内の公差はFKM70°に適用します。